

JL Toppteknik AB

TG 11 Marginal

Data: TG 11 Marginal

Material snow gun:
Aluminium

Material tower:
Galvanized steel

Weight snowgun: 65 kg
Weight bracket: 38 kg

Length snowgun: 11 m

Raise, lower and swivel mechanism :
Mechanical or motor-driven screw or hydraulic hand pump

Bracket for different needs:
Concrete foundation
Pole bracket
Rock foundation

Capacity / water at 30 bar water pressure:

-3 °C, 100 L / min =
About 15 m³ snow / hour

-5°C 200 L / min =
About 30 m³ snow/hour

-7°C 300 L / min =
About 45 m³ snow/hour

Waterflow:
Between 50-450 liter water/ minutes

Compressed air consumption:
Between 1 och 2 m³/ minute.

Air pressure: >7 bar
Water pressure: 15 - 50 bar

JL Toppteknik AB is certified for ISO 9001 quality and ISO 14001 Environment




Detailed information about TG 11 Marginal

Top Gun 11 Marginal is an adjustable snow gun with the possibility of extra addition of water, and if necessary, compressed air.

The regulation of the air and water takes place at the snow gun's base and can be serviced during operation.

The snow gun is equipped with 6 water nozzles, and the two rear can be opened and closed by a valve at the bottom of the gun.

The snow gun has 4 air holes with regulation of the rear two holes, which means that you can run the gun as a standard Top Gun, and then increase the flow to double with a small valve when to run in marginal conditions.

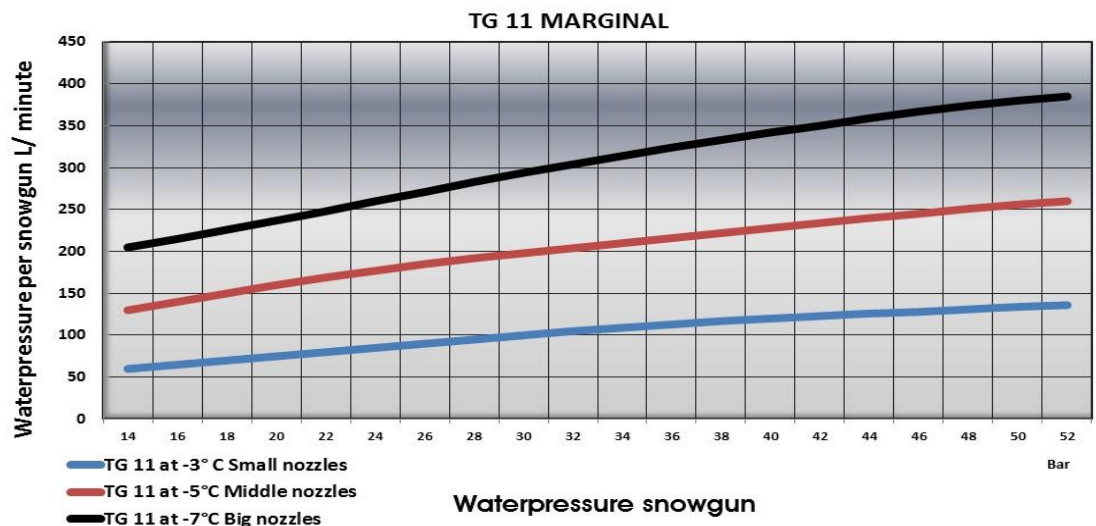

Top Gun 11 Margin is a gun for you that prioritize the ease of snowmaking, with controllability of the snow quality.
Snowmaking with TG 11 Margin is possible even with high temperatures.

JL Toppteknik AB | Rönna väg 19 | 686 31 SUNNE | SWEDEN
Tfn: +46 (0)565 711 210 | jens.eide@toppteknik.se